

Dayliff Seko AM chemical dosing pumps are high specification products for the accurate dosage of a wide range of chemicals in general water treatment and industrial process applications.

### Features

- Positive displacement diaphragm type with micro processor based analogue magnetic solenoid motors
- Adjustable flow rate via a control dial on the front panel which varies stroke frequency
- Fitted with an operating status LED which indicates stroke cycles and fault conditions
- Level control input to stop pump when solution tank empties
- Construction of corrosion resistant PVC for the pump bodies and dosing heads, PTFE diaphragm for universal chemical resistance and ceramic ball valve
- Supplied complete with installation kits including foot valve, mounting screws, injection valve, 2m PE delivery tube, 4m PVC suction and bleeding tube and a wall mounting bracket
- Two models available, AML with manually adjustable flow rate in ranges 0-20%, 0-100% and AMM with proportional flow rate determined by an external analogue signal

### Operating Conditions

**Max Flow:** 5l/hr

**Max Stroke Rate:** 160/min

**Power Input:** 240 VAC/50 Hz


**Max Pressure:** 8 Bar

**Connections:** 4/6 mm

**V Stroke:** 0.52cc

**Input Power:** 14W

### Pump Features and Dimensions

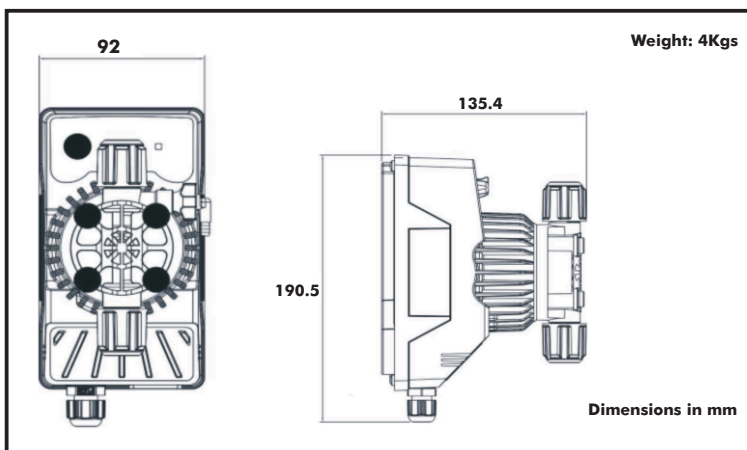

### Chemical Tanks

